

SINGLE-PHASE BATTERY INVERTER WITHOUT TRANSFORMER

3TL / 6TL

The INGECON® SUN STORAGE 1Play battery inverter is a single-phase, two-way unit that can either be used in off-grid systems or connected to the general supply network.

Battery management

The INGECON® SUN STORAGE 1Play inverters feature cutting-edge technology to control the charging and discharging of the storage system in order to maximise the battery service life. The battery temperature could be controlled at all times, ensuring correct battery operation and durability. The inverter incorporates a pre-charge system to avoid battery inrush currents.

Back-up genset

The INGECON® SUN STORAGE 1Play permits the connection of a back-up genset, should this be necessary. Furthermore, the inverter

can be started-up using this generator, in order to charge the batteries when these are completely discharged.

PV input

INGECON® SUN STORAGE 1Play inverters incorporate a PV input. Thanks to this input, the PV array can be connected directly to the inverter. Moreover, this inverter can be also operated without batteries, as a conventional grid-tied photovoltaic inverter, allowing a later addition of the energy storage system.

Energy Management System

Optionally, the inverter can integrate an energy management system (EMS Board). The EMS Board enables some more advanced features, as self-consumption or grid support.

5 year warranty, extendible up to 25 years



PROTECTIONS

- AC overvoltages.
- Insulation faults.
- Output shortcircuits and overloads.
- DC switch for the PV field.

OPTIONAL ACCESSORIES

- RS-485 communication.
- Ethernet communication.
- INGECON® SUN EMS Board with Wi-Fi and Ethernet communication.

MAIN FEATURES

- PV input.
- CAN communication for smart batteries.
- Configurable potential-free inputs.
- Configurable potential-free outputs, some for the connection and disconnection of the back-up genset.
- DC pre-charge system.
- Battery temperature measurement circuit built-in. PT100 (3-wire) needed.

3TL / 6TL

Operating modes*:

- Stand-alone mode

The INGECON® SUN STORAGE 1Play inverter generates a stand-alone AC grid and acts as a grid manager, guaranteeing the correct balance between generation, consumption and the storage system. To do so, it controls the energy flow between the grid and the batteries, based on the status at any given time.

The INGECON® SUN STORAGE 1Play inverter makes it possible to integrate a solar energy source into the grid, as it integrates a photovoltaic input. An advanced control system, requiring no communications, manages the power generated by the PV inverters, based on consumption data and the battery charge status. The back-up power source (a genset or the public grid) only connects when the battery state of charge is below a certain programmable threshold.

- Back-up mode

This operating mode has been designed for grid-connected systems, where grid outages are long and frequent, meaning that a back-up power source is required. The INGECON® SUN STORAGE 1Play inverter operates through a connection to the AC grid. In order to guarantee a power source, the inverter maintains the batteries charged. During a grid outage, the battery inverter generates the AC network and the energy stored in the batteries is used to power the loads. If any renewable energy sources are connected to the grid and the energy generated is greater than the one demanded, then the surplus could be injected into the grid.

- Self-consumption mode

This operating mode is conceived for grid-connected systems with renewable energy sources, in order to minimise grid consumption. If the energy generated is greater than the one demanded, any surplus energy could charge the batteries or, if they are fully charged, the energy could be injected into the grid. If the loads demand more energy than the one produced by the renewable sources, then the batteries would cover this demand, increasing the self-consumption ratio.

- Grid support


In this operating mode the inverter operates under the instructions of an external controller (EMS). Thus, in combination with the EMS Board and an external wattmeter, the inverter is able to adapt the output power to a required value. In this way, different options are available: ramp rate control, self-consumption or constant power output in a PV plant.

(*) Important information for Australia:


The inverters are not approved to the standard AS4777.2 2020 and cannot connect to the grid (neither via input or output ports) as part of an inverter energy system in accordance with the requirements of AS/NZS 4777.1

CONNECTION SCHEMA

Single-phase

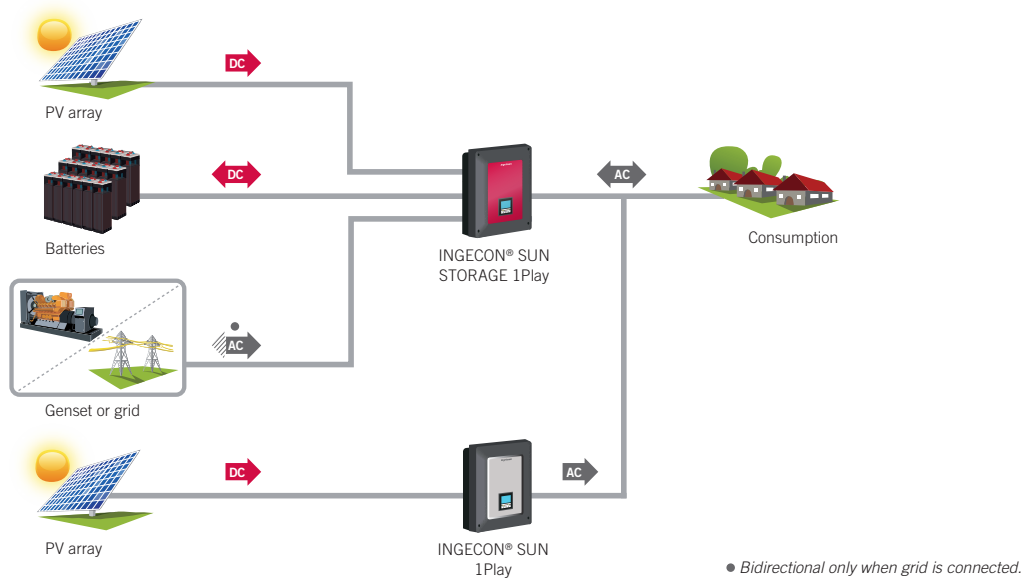


Size and weight (mm)



3TL / 6TL
26 kg.

Output power versus battery voltage

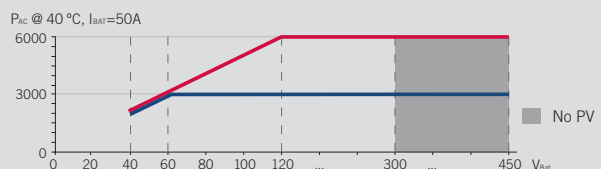

	3TL	6TL
Nominal power	3 kVA	6 kVA
Max. temperature for rated power	40 °C	
Storage system input (DC)		
Voltage range with PV installed ⁽¹⁾	40 ~ 300 V	
Voltage range without PV installed ⁽¹⁾	40 ~ 450 V	
Maximum charge / discharge current	50 A	
Battery type	Lead-Acid, Li-ion ⁽²⁾	
Communication with Li-Ion batteries	CAN Bus 2.0	
PV array input (DC)		
PV array maximum power	7.5 kWp	11.5 kWp
MPP Voltage range	330 ⁽³⁾ ~ 480 V	
Maximum input voltage	550 V ⁽⁴⁾	
Maximum input current	20 A	30 A
MPPT	1	
Number of strings	2	
Auxiliary grid / genset input (AC)		
Rated voltage	230 V	
Voltage range	172 ~ 264 V	
Nominal frequency	50 / 60 Hz	
Frequency range	40 ~ 70 Hz	
Maximum power	11,500 VA	
Maximum current	50 A rms	
Cosine of Phi	0 ~ 1	
Consumption grid output (AC)		
Stand-alone mode		
Power (25 °C) 30 min, 2 min, 3 s ⁽⁵⁾	3,500 / 3,900 / 5,080 W	6,400 / 6,900 / 7,900 W
Maximum current	13 A rms	26 A rms
Rated voltage ⁽⁶⁾	220 ~ 240 V	
Nominal frequency ⁽⁶⁾	50 / 60 Hz	
Cosine of Phi	-0.8 ~ 1 ~ 0.8	
On-grid mode		
Maximum current	50 A rms	
Voltage range	172 ~ 264 V	
Frequency range	40 ~ 70 Hz	
Cosine of Phi	-0.8 ~ 1 ~ 0.8	
Response time of the Back-up function	12 ms	
Performance		
Maximum efficiency	95.5%	96%
Euroefficiency	95.1%	95.2%
General data		
Cooling system	Forced ventilation	
Air flow	27 m³/h	45 m³/h
Stand-by consumption	< 10 W	
Operating temperature	-20 ~ +65 °C	
Relative humidity (without condensation)	4 ~ 100 %	
Protection class	IP65	
Maximum altitude	2,000 m	
Marking	CE	
EMC and safety regulations	EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 61000-3-11, EN 61000-3-12, EN 62109-1, EN62109-2, EN 50178, IEC62103, AS62040.1, FCC Part 15	
Distribution grid connection regulations	DIN V VDE V 0126-1-1, EN 50438, CEI 0-21, VDE-AR-N4105:2011-08, G59/3, G83/2, AS4777.2:2015, IEC 62116, IEC 61727, UNE 206007-1:2013, UNE 206006:2011, UNE 217001 IN:2015,NRS097-2-1, ABNT NBR 16149, ABNT NBR 16150, DEWA, South African Grid code, IEEE 929 Thailand MEA & PEA requirements, Netbilling Chile	

Notes: ⁽¹⁾ The maximum power of the inverter is a calculation of the battery voltage multiplied by the maximum discharge current (50 A) ⁽²⁾ See the list of compatible Li-Ion batteries ⁽³⁾ In On-grid mode $V_{mpp,min} = 1.44 \times V_{ac}$ (distribution grid voltage). In Off-grid mode $V_{mpp,min} = 1.44 \times V_{ac}$ (rated voltage configured for the consumption grid) ⁽⁴⁾ Never exceed this value. Consider the voltage increase of the panels 'Voc' at low temperatures ⁽⁵⁾ This power will be available if the battery voltage multiplied by the maximum discharge current reaches these values ⁽⁶⁾ This parameter can be set on the display.



Ingeteam

Ingeteam Power Technology, S.A.
Avda. Ciudad de la Innovación, 13
31621 Sarriguren (Navarra) - Spain
Tel.: +34 948 288 000
Fax: +34 948 288 001
e-mail: solar.energy@ingeteam.com

Ingeteam S.r.l.
Via Emilia Ponente, 232
48014 Castel Bolognese (RA) - Italy
Tel.: +39 0546 651 490
Fax: +39 054 665 5391
e-mail: italia.energy@ingeteam.com

Ingeteam SAS
La Naurouze B - 140 rue Carmin
31670 Labège - France
Tel.: +33 (0)5 61 25 00 00
Fax: +33 (0)5 61 25 00 11
e-mail: france@ingeteam.com

Ingeteam INC.
3550 W. Canal St.
Milwaukee, WI 53208 - USA
Tel.: +1 (414) 934 4100 / +1 (855) 821 7190
Fax: +1 (414) 342 0736
e-mail: solar.us@ingeteam.com

Ingeteam, a.s.
Technologická 371/1
70800 Ostrava - Pustkovec
Czech Republic
Tel.: +420 59 747 6800
Fax: +420 59 732 6899
e-mail: czech@ingeteam.com

Ingeteam Shanghai, Co. Ltd.
Shanghai Trade Square, 1105
188 Si Ping Road
200086 Shanghai - P.R. China
Tel.: +86 21 65 07 76 36
Fax: +86 21 65 07 76 38
e-mail: shanghai@ingeteam.com

Ingeteam, S.A. de C.V.
Leibnitz Ext 13 Int 1102, Colonia Anzures
11590 - Miguel Hidalgo
Ciudad de México - Mexico
Tel.: +52 81 8311 4858
Fax: +52 81 8311 4859
e-mail: northamerica@ingeteam.com

Ingeteam Ltda.
Rua Estácio de Sá, 560
Jd. Santa Genebra
13080-010 Campinas/SP - Brazil
Tel.: +55 19 3037 3773
e-mail: brazil@ingeteam.com

Ingeteam Pty Ltd.
Unit 2 Alphen Square South
16th Road, Randjiespark
Midrand 1682 - South Africa
Tel.: +2711 314 3190
Fax: +2711 314 2420
e-mail: southafrica@ingeteam.com

Ingeteam SpA
Los militares 5890, Torre A, oficina 401
7560742 - Las Condes
Santiago de Chile - Chile
Tel.: +56 2 29574531
e-mail: chile@ingeteam.com

Ingeteam Power Technology India Pvt. Ltd.
2nd Floor, 431
Udyog Vihar, Phase III
122016 Gurgaon (Haryana) - India
Tel.: +91 124 420 6491-5
Fax: +91 124 420 6493
e-mail: india@ingeteam.com

Ingeteam Sp. z o.o.
Ul. Koszykowa 60/62 m 39
00-673 Warszawa - Poland
Tel.: +48 22 821 9930
Fax: +48 22 821 9931
e-mail: polska@ingeteam.com

Ingeteam Australia Pty Ltd.
iAccelerate Centre, Building 239
Innovation Campus, Squires Way
North Wollongong, NSW 2500 - Australia
Tel.: +61 429 111 190
e-mail: australia@ingeteam.com

Ingeteam Panama S.A.
Av. Manuel Espinosa Batista,
Ed. Torre Internacional
Business Center, Apto./Local 407
Urb.C45 Bella Vista
Bella Vista - Panama
Tel.: +50 761 329 467

Ingeteam Service S.R.L.
Bucuresti, Sector 2,
Bulevardul Dimitrie Pompeiu Nr 5-7
Cladirea Hermes Business
Campus 1, Birou 236, Etaj 2
Romania
Tel.: +40 728 993 202

Ingeteam Philippines Inc.
Office 2, Unit 330, Milelong Bldg.
Amorsolo St. corner Rufino St.
1230 Makati
Gran Manila - Philippines
Tel.: +63 0917 677 6039

Ingeteam Power Technology, S.A.
Level 1, Al Bateen Tower C6 Bainunah
ADIB Building, Street 34
PO BOX 30010 - Abu Dhabi
United Arab Emirates
Tel.: +971 50 125 8244

Ingeteam Vietnam Ltd.
Spaces - 28A Tran Hung Dao Street
Phan Chu Trinh Ward
Hoan Kiem District
Ha Noi City - Vietnam
Tel.: +84 24 71014057
e-mail: vietnam@ingeteam.com

Ingeteam Uruguay, S.A.
Avenida 18 de Julio, 1474, Piso 12
11200, Montevideo - Uruguay
Tel.: +598 934 92064