

**TRANSFORMERLESS
CENTRAL
INVERTERS WITH
A MASTER-SLAVE
CONFIGURATION**

600TL U X330 Outdoor / 800TL U X330 Outdoor

The central inverter with a Master-Slave configuration, in any of its versions, is equipped with three to four power blocks, connected in parallel to the same PV generator and to the same medium voltage transformer.

DC and AC supplies in the same cabinet

The input and output lines are integrated into the same cabinet, facilitating maintenance and repair work.

Maximum efficiency values

Through the use of innovative electronic conversion topologies, efficiency values up to 98.6% can be easily achieved. Thanks to a sophisticated control algorithm, this equipment can guarantee maximum efficiency through the selective operation of its power blocks, based on the PV power available. This maximizes the efficiency and service life of the equipment. In this way, in periods of low irradiance, it is able to increase performance by up to 1.8 points.

Enhanced functionality

This new INGECON® SUN PowerMax U inverter range features a revamped, improved enclosure which, together with its innovative air cooling system, makes it possible to increase the ambient operating temperature to deliver its rated power up to 122 °F (50 °C).

A complete range of equipment for all types of projects

The PowerMax U inverters are fully adaptable to all types of engineering projects. This is made possible thanks to their wide range of power outputs and to the variety of possible configurations.

Maximum protection

These three-phase inverters are equipped with a motorized DC load break switch to decouple the PV generator from the inverter. Optionally, the PowerMax U inverters can be supplied with DC fuses. Optional positive or negative grounding, or non-grounded.



600TL U X330 Outdoor / 800TL U X330 Outdoor

Long-lasting design

The inverters have been designed to guarantee a service life of more than 20 years, as demonstrated by the stress tests they are subjected to. Standard 5 year warranty, extendable for up to 20 years.

Grid support

The INGECON® SUN PowerMax U family has been designed to comply with the grid connection requirements in different countries, contributing to the quality and stability of the electric system. These inverters therefore can deliver reactive power and control the active power delivered to the grid.

Ease of maintenance

Easily replaceable modular power blocks for shorter maintenance times.

Easy to operate

The INGECON® SUN PowerMax U inverters feature an LCD screen for the simple and convenient monitoring of the inverter status and a range of internal variables. The display also includes a number of LEDs to show the inverter operating status with warning lights to indicate any incident. All this helps to simplify and facilitate maintenance tasks.

Monitoring and communication

RS-485 communications supplied as standard for monitoring the internal operating variables (alarms, real time production data, etc.) in addition to the historical production data. Ethernet, GSM / GPRS and Bluetooth are also available. The following applications are included at no extra cost: INGECON® SUN Manager, INGECON® SUN Monitor and its iSun Monitor Smartphone version for monitoring and recording the inverter data over the Internet.

PROTECTIONS

- DC reverse polarity.
- Short-circuits and overloads at the output.
- Anti-islanding with automatic disconnection.
- Insulation failure.
- 4 DC fuse-holders per power block.
- Non-grounded inverters have both poles protected.
- DC and AC surge arresters, type 2.
- Motorized DC switch for the automatic disconnection of the inverter from the PV array.
- AC fuses.


OPTIONAL ACCESSORIES

- GSM / GPRS remote communication.
- Inter-inverter communication via Ethernet or Bluetooth.
- Kit for operating at an ambient temperature of -22 °F (-30 °C).
- DC fuses.
- Monitoring of the input DC currents.
- Wattmeter on the AC side.
- Low voltage ride-through capability.
- Auxiliary services kit.


ADVANTAGES OF THE MASTER-SLAVE VERSION

- Enhanced performance.
- In the event of the failure of one of the blocks, the power is then distributed amongst the remaining blocks.
- Lightweight spares, for shorter delivery times.
- It allows to ground the PV array, either the positive or the negative pole.


PowerMax TL U X Series Outdoor

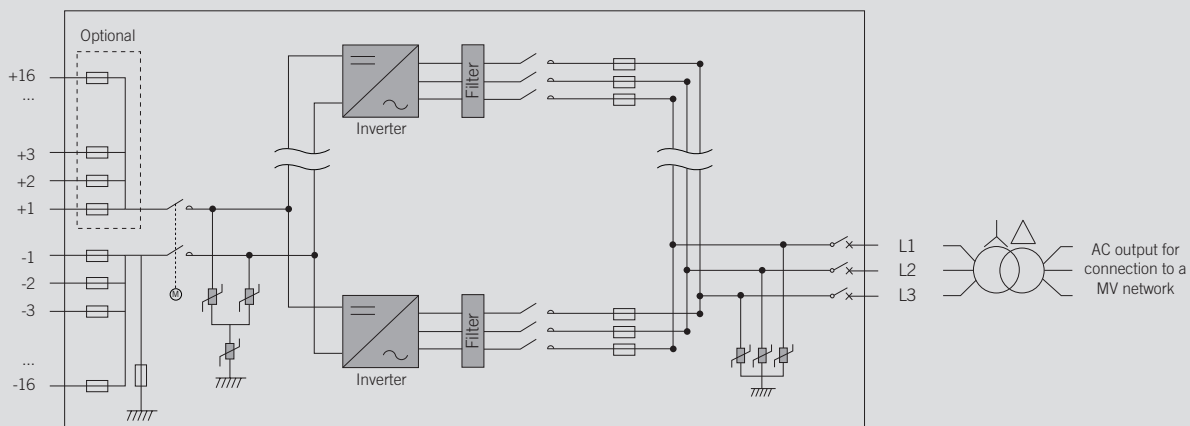

Size and weight (inches and lbs)



600TL U X330 Outdoor
4,520 lbs




800TL U X330 Outdoor
5,950 lbs

	600TL U X330 Outdoor	800TL U X330 Outdoor
Input (DC)		
Recommended PV array power range ⁽¹⁾	609.2 - 803.4 kWp	812 - 1,071.2 kWp
Voltage Range MPP	484 - 820 V	484 - 820 V
Maximum voltage ⁽²⁾	1,000 V	1,000 V
Maximum current	1,170 A	1,560 A
N° inputs with fuse holders	8 - 16 (16 - 32 for floating configuration)	8 - 16 (16 - 32 for floating configuration)
Fuse dimensions	125 A / 1,000 V to 400 A / 1,000 V fuses, maximum current from 82 to 260 A for positive and negative poles	
Type of connection	Connection to copper bars	
Power blocks	3	4
MPPT	1	1
Current at each input	82 to 260 A	82 to 260 A
Input protections		
Overvoltage protections	DC surge arresters, type 2	
DC switch	Motorized DC switch	
Other protections	DC insulation monitor with alarm. Optionally, from 8 to 16 pairs of DC fuses (16 to 32 pairs for floating configuration)	
Output (AC)		
Rated power ⁽³⁾	600 kVA	800 kVA
Maximum current	1,050 A	1,400 A
Rated voltage	330 V IT System	330 V IT System
Frequency	50 / 60 Hz	50 / 60 Hz
Phi Cosine ⁽⁴⁾	1	1
Phi Cosine adjustable	Yes. Smax=600 kVA	Yes. Smax=800 kVA
THD (Total Harmonic Distortion) ⁽⁵⁾	<3%	<3%
Output protections		
Overvoltage protections	AC surge arresters, type 2	
AC switch	Yes	
Anti-islanding protection	Yes, with automatic disconnection (for each power stage)	
Other protections	AC fuses, AC short circuits and overloads (for each power stage)	
Features		
Maximum efficiency	98.5%	98.5%
CEC	98%	98%
Stand-by consumption ⁽⁶⁾	90 W	120 W
Consumption at night	90 W	120 W
General Information		
Ambient temperature	-4 °F to 149 °F (-20 °C to 65 °C)	-4 °F to 149 °F (-20 °C to 65 °C)
Relative humidity (non-condensing)	0 - 95%	0 - 95%
Protection class	NEMA 3R	NEMA 3R
Maximum altitude ⁽⁷⁾	9,842 ft (3,000 m)	9,842 ft (3,000 m)
Cooling system	Air forced with temperature control (230 V phase + neutral power supply)	
Air flow	37.96 ft³/s (fans: 1,300 VA)	45.56 ft³/s (fans:1,500 VA)
Acoustic emission	< 55 dB (A) at 4 m and < 67 dB (A) at 1 m with fans working at maximum power	
Marking	CE, ETL	
EMC and security standards	UL1741, FCC Part 15, IEEE C37.90.1, IEEE C37.90.2	
Grid connection standards	IEC 62116, UL1741, IEEE1547, IEEE1547.1, NEC CODE	

Notes: ⁽¹⁾ Depending on the type of installation and geographical location. Data for STC conditions ⁽²⁾ Consider the voltage increase of the 'Voc' at low temperatures ⁽³⁾ AC Power for 122 °F (50 °C) ambient temperature. The output power will be reduced at the rate of 1% for each 1 °F (0.56 °C) of increase ⁽⁴⁾ For P_{out}>25% of the rated power ⁽⁵⁾ For P_{out}>25% of the rated power and voltage in accordance with IEEE 1547.1 ⁽⁶⁾ Consumption from PV field ⁽⁷⁾ Over 3,300 ft temperature for rated power 122 °F (50 °C) is reduced 2.42 °F each 1,000 ft.

Efficiency INGECON® SUN 800TL U X330 Outdoor V_{dc} = 484 V

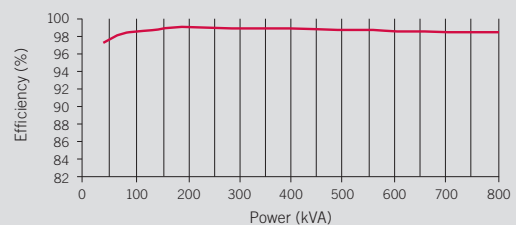



Ingeteam

Ingeteam INC.

5201 Great American Parkway, Suite 320
SANTA CLARA, CA 95054 - USA
Tel.: +1 (415) 450 1869 / +1 (408) 524 2929 / Fax: +1 (408) 824 1327
e-mail: solar.us@ingeteam.com

Ingeteam INC.

3550 W. Canal St.
MILWAUKEE, WI 53208 - USA
Tel.: +1 (414) 934 4100 / +1 (855) 821 7190 / Fax: +1 (414) 342 0736
e-mail: solar.us@ingeteam.com

Ingeteam Power Technology, S.A.

Avda. Ciudad de la Innovación, 13
31621 SARRIGUREN (Navarra) - Spain
Tel.: +34 948 288 000 / Fax: +34 948 288 001
e-mail: solar.energy@ingeteam.com

Ingeteam S.r.l.

Via Emilia Ponente, 232
48014 CASTEL BOLOGNESE (RA) - Italy
Tel.: +39 0546 651 490 / Fax: +39 054 665 5391
e-mail: italia.energy@ingeteam.com

Ingeteam GmbH

Herzog-Heinrich-Str. 10
80336 MUNICH - Germany
Tel.: +49 89 99 65 38 0 / Fax: +49 89 99 65 38 99
e-mail: solar.de@ingeteam.com

Ingeteam SAS

La Naurouze B - 140 rue Carmin
31670 Labège - France
Tel: +33 (0)5 61 25 00 00 / Fax: +33 (0)5 61 25 00 11
e-mail: france@ingeteam.com

Ingeteam, a.s.

Technologická 371/1
70800 OSTRAVA - PUSTKOVEC
Czech Republic
Tel.: +420 59 732 6800 / Fax: +420 59 732 6899
e-mail: czech@ingeteam.com

Ingeteam Shanghai, Co. Ltd.

Shanghai Trade Square, 1105
188 Si Ping Road
200086 SHANGHAI - P.R. China
Tel.: +86 21 65 07 76 36 / Fax: +86 21 65 07 76 38
e-mail: shanghai@ingeteam.com

Ingeteam, S.A. de C.V.

Ave. Revolución, nº 643, Local 9
Colonia Jardín Español - MONTERREY
64820 - NUEVO LEÓN - México
Tel.: +52 81 8311 4858 / Fax: +52 81 8311 4859
e-mail: northamerica@ingeteam.com

Ingeteam Ltda.

Estrada Duílio Beltramini, 6975
Chácara Sao Bento
13278-078 VALINHOS SP - Brazil
Tel.: +55 19 3037 3773 / Fax: +55 19 3037 3774
e-mail: brazil@ingeteam.com

Ingeteam Pty Ltd.

Unit 2 Alphen Square South
16th Road, Randjiespark, Midrand 1682 - South Africa
Tel.: +2711 314 3190 / Fax: +2711 314 2420
e-mail: southafrica@ingeteam.com

Ingeteam SpA

Cerro El Plomo 5630, Piso 9, Oficina 901
7560742 Las Condes - Santiago de Chile - Chile
Tel.: +56 2 26664370
e-mail: chile@ingeteam.com

Ingeteam Power Technology India Pvt. Ltd.

2nd Floor, 431
Udyog Vihar, Phase III
122016 Gurgaon (Haryana) - India
Tel.: +91 124 420 6491-5 / Fax: +91 124 420 6493
e-mail: india@ingeteam.com

Ingeteam Sp. z o.o.

Ul. Koszykowa 60/62 m 39
00-673 Warszawa - Poland
Tel.: +48 22 821 9930 / Fax: +48 22 821 9931
e-mail: polska@ingeteam.com

Ingeteam Australia Pty Ltd.

Suite 112, Level 1, Mike Codd Building 232
Innovation Campus, Squires Way
North Wollongong, NSW 2500 - Australia
Tel.: +61 499 988 022
e-mail: australia@ingeteam.com