

**THREE-PHASE
TRANSFORMERLESS
BATTERY INVERTER
WITH THE
MAXIMUM POWER
DENSITY****100TL**

Three-phase battery inverters for commercial, industrial and large-scale systems. These bi-directional storage inverters feature the same technology as Ingeteam's central photovoltaic inverters.

Lower operational costs

Thanks to the wireless communication network that the INGECON® SUN STORAGE 100TL enables, the storage system could be commissioned, monitored and controlled without cables. Moreover, its string inverter philosophy allows for a fast and easy replacement that does not require qualified technicians.

Greater flexibility and power density

A greater flexibility is possible thanks to its maximum DC voltage (1,100 V) and to its wide input voltage range (570-850 V). Great power density, with 100 kW of power in only 80 kg.

Robust and long-lasting design

Aluminium casing, especially conceived for outdoor installations (IP65). The design of the INGECON® SUN STORAGE 3Play inverter family guarantees the maximum life expectancy and the best features, even with high temperatures.

Ethernet and Wi-Fi as standard

This battery inverter features Ethernet and Wi-Fi communications as standard. These communications, together with the webserver that the inverter integrates, allow for a faster and more reliable commissioning by using a mobile phone, tablet or laptop. Furthermore, it is compatible with an external Cloud Connect.

Standard 5 year warranty, extendable up to 25 years



100TL

MAIN FEATURES

- Low voltage ride-through capability.
- Reactive power capability.
- Compatible with external Cloud Connect software.
- 98.8% maximum efficiency.
- Ethernet and Wi-Fi communications supplied as standard.
- Integrated Webserver.
- Software INGECON® SUN Monitor for PV plant monitoring.
- Suitable for indoor and outdoor installations (IP65).
- High temperature performance.
- Compatible with night power supply.
- 4 digital inputs and 2 digital outputs.
- It is necessary to add a pre-charge system.

PROTECTIONS

- Shortcircuits and overloads at the output.
- Anti-islanding with automatic disconnection.
- Insulation faults.
- AC overvoltages with type 2 surge arresters.
- DC overvoltages with type 2 surge arresters.

OPTIONAL ACCESSORIES

- Self-consumption kit.
- RS-485 communication.


BENEFITS

- Greater power density.
- Greater cost-effectiveness thanks to the cabling cost reduction.
- High availability compared to central inverters.
- High efficiency rates.
- Easy maintenance.


Integrated elements

Terminal blocks	✓
DC switch	✓
DC surge arresters, type 2	✓
AC surge arresters, type 2	✓

3Play TL

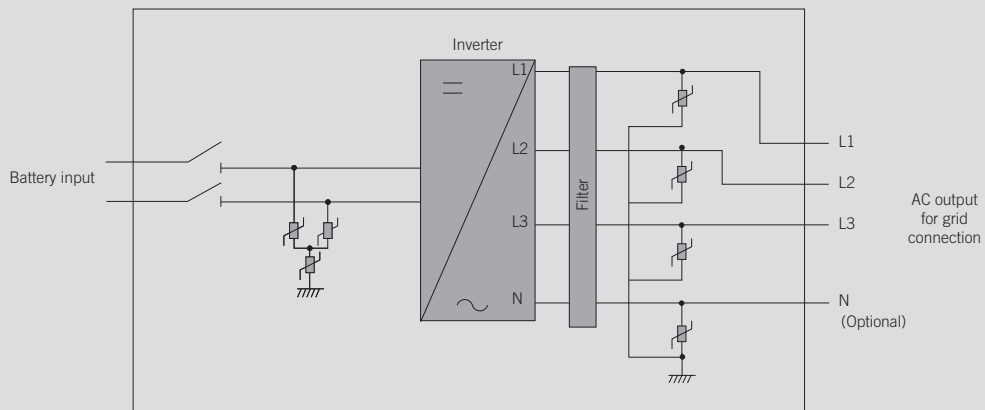


Size and weight (mm)



100TL	
Input (DC)	
Voltage range	570 - 850 V
Maximum voltage ⁽¹⁾	1,100 V
Maximum power (charge / discharge)	60 kW / 100 kW
Maximum current (charge / discharge)	111 A / 185 A
Battery type	Li-ion, lead
Shortcircuit current	240 A
Communication with the BMS (Battery Management System)	CAN Bus 2.0 / Ethernet
Output (AC)	
Rated power	100 kW
Max. temperature at rated power ⁽²⁾	50 °C
Maximum current	145 A
Rated voltage	400 V
Rated frequency	50 / 60 Hz
Power factor	1
Adjustable power factor	Yes. Smax=100 kVA Qmax=100 kVAR
THD	<3%
Efficiency	
Maximum efficiency	98.8%
Euroefficiency	98.1%
General Information	
Refrigeration system	Forced ventilation
Air flow	570 m³/h
Stand-by consumption	20 W
Consumption at night	1 W
Ambient temperature	-25 °C to 60 °C
Relative humidity (non-condensing)	0 - 100%
Protection class	IP65 / NEMA 4
RCD	1,000 mA
Maximum operating altitude ⁽³⁾	3,000 m
Connection	AC: Max. Cross section: 240 mm² (one wire) DC connection: Max. Cross section: 300 mm² (one wire) Copper and Aluminium cabling permitted for DC and AC
Marking	CE
EMC and safety standards	EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 61000-3-2, EN 61000-3-3, EN 61000-3-11, EN 61000-3-12, EN 62109-1, EN 62109-2, IEC62103, EN 50178, FCC Part 15, IEC60068-2-1:2007, IEC60068-2-2:20007, IEC60068-2-14:2009, IEC60068-2-30:2005, IEC62116, IEC61683 y EN50530
Grid connection standards	DIN V VDE V 0126-1-1, Arrêté du 23 avril 2008, EN 50438, EN 50439, EN 50549, CEI 0-21, CEI 0-16 VDE-AR-N 4105:2011-08, G59/3, P.O.12.3, AS4777.2, AS62040.1.1, BDEW, IEC 62116, IEC 61727, UNE 206007-1, ABNT NBR 16149, ABNT NBR 16150, Brazilian Grid Code, South African Grid Code, Chilean Grid Code, DEWA 2.0, Jordanian Grid Code, Thailand MEA & PEA requirements

Notes: ⁽¹⁾ The inverter does not start operating until Vdc <1,000 V ⁽²⁾ For each °C of increase, the output power will be reduced at the rate of 2.3% ⁽³⁾ Beyond 1,000 m, the maximum temperature at rated power will decrease at the rate of 5.5 °C per every additional 1,000 m.

Efficiency INGECON® SUN STORAGE 100TL Vdc = 570 V

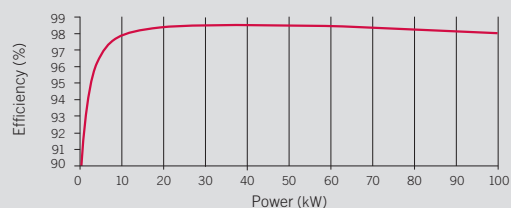



Ingeteam

Ingeteam Power Technology, S.A.
Avda. Ciudad de la Innovación, 13
31621 Sarriguren (Navarra) - Spain
Tel.: +34 948 288 000
Fax: +34 948 288 001
e-mail: solar.energy@ingeteam.com

Ingeteam S.r.l.
Via Emilia Ponente, 232
48014 Castel Bolognese (RA) - Italy
Tel.: +39 0546 651 490
Fax: +39 054 665 5391
e-mail: italia.energy@ingeteam.com

Ingeteam SAS
La Naurouze B - 140 rue Carmin
31670 Labège - France
Tel.: +33 (0)5 61 25 00 00
Fax: +33 (0)5 61 25 00 11
e-mail: france@ingeteam.com

Ingeteam INC.
3550 W. Canal St.
Milwaukee, WI 53208 - USA
Tel.: +1 (414) 934 4100 / +1 (855) 821 7190
Fax: +1 (414) 342 0736
e-mail: solar.us@ingeteam.com

Ingeteam, a.s.
Technologická 371/1
70800 Ostrava - Pustkovec
Czech Republic
Tel.: +420 59 747 6800
Fax: +420 59 732 6899
e-mail: czech@ingeteam.com

Ingeteam Shanghai, Co. Ltd.
Shanghai Trade Square, 1105
188 Si Ping Road
200086 Shanghai - P.R. China
Tel.: +86 21 65 07 76 36
Fax: +86 21 65 07 76 38
e-mail: shanghai@ingeteam.com

Ingeteam, S.A. de C.V.
Leibnitz Ext 13 Int 1102, Colonia Anzures
11590 - Miguel Hidalgo
Ciudad de México - Mexico
Tel.: +52 81 8311 4858
Fax: +52 81 8311 4859
e-mail: northamerica@ingeteam.com

Ingeteam Ltda.
Rua Estácio de Sá, 560
Jd. Santa Genebra
13080-010 Campinas/SP - Brazil
Tel.: +55 19 3037 3773
e-mail: brazil@ingeteam.com

Ingeteam Pty Ltd.
Unit 2 Alphen Square South
16th Road, Randjiespark
Midrand 1682 - South Africa
Tel.: +2711 314 3190
Fax: +2711 314 2420
e-mail: southafrica@ingeteam.com

Ingeteam SpA
Los militares 5890, Torre A, oficina 401
7560742 - Las Condes
Santiago de Chile - Chile
Tel.: +56 2 29574531
e-mail: chile@ingeteam.com

Ingeteam Power Technology India Pvt. Ltd.
2nd Floor, 431
Udyog Vihar, Phase III
122016 Gurgaon (Haryana) - India
Tel.: +91 124 420 6491-5
Fax: +91 124 420 6493
e-mail: india@ingeteam.com

Ingeteam Sp. z o.o.
Ul. Koszykowa 60/62 m 39
00-673 Warszawa - Poland
Tel.: +48 22 821 9930
Fax: +48 22 821 9931
e-mail: polska@ingeteam.com

Ingeteam Australia Pty Ltd.
iAccelerate Centre, Building 239
Innovation Campus, Squires Way
North Wollongong, NSW 2500 - Australia
Tel.: +61 429 111 190
e-mail: australia@ingeteam.com

Ingeteam Panama S.A.
Av. Manuel Espinosa Batista,
Ed. Torre Internacional
Business Center, Apto./Local 407
Urb.C45 Bella Vista
Bella Vista - Panama
Tel.: +50 761 329 467

Ingeteam Service S.R.L.
Bucuresti, Sector 2,
Bulevardul Dimitrie Pompeiu Nr 5-7
Cladirea Hermes Business
Campus 1, Birou 236, Etaj 2
Romania
Tel.: +40 728 993 202

Ingeteam Philippines Inc.
Office 2, Unit 330, Milelong Bldg.
Amorsolo St. corner Rufino St.
1230 Makati
Gran Manila - Philippines
Tel.: +63 0917 677 6039

Ingeteam Power Technology, S.A.
Level 1, Al Bateen Tower C6 Bainunah
ADIB Building, Street 34
PO BOX 30010 - Abu Dhabi
United Arab Emirates
Tel.: +971 50 125 8244

Ingeteam Vietnam Ltd.
Spaces - 28A Tran Hung Dao Street
Phan Chu Trinh Ward
Hoan Kiem District
Ha Noi City - Vietnam
Tel.: +84 24 71014057
e-mail: vietnam@ingeteam.com

Ingeteam Uruguay, S.A.
Avenida 18 de Julio, 1474, Piso 12
11200, Montevideo - Uruguay
Tel.: +598 934 92064

Ingeteam S.A.

www.ingeteam.com