INGECON SUN STORAGE 1Play

Series TL M

3TL M / 4.5TL M / 6TL M

SINGLE-PHASE HYBRID INVERTER WITH TWO SOLAR MPPTs

The INGECON® SUN STORAGE 1Play TL M hybrid inverter makes it possible to combine photovoltaic generation and energy storage with no need for any additional PV inverters.

Dual MPPT system
This inverter features a dual maximum power point tracking (MPPT) system, that allows it to draw the maximum power from the PV array, including roof-mounted installations with different orientations or with partial shading.

EMS Inside
The inverter is equipped as standard with an energy management system (EMS). The EMS permits more advanced functionalities, such as self-consumption. Thanks to the built-in EMS, the installation can be monitored at all times via a PC or mobile phone with the free INGECON® SUN Monitor application, available at Play Store and App Store.

Start-up and monitoring
Fast and easy start-up and display of data and graphics through the integrated user interface. Furthermore, users can easily upgrade the inverter firmware from the application, through a PC, tablet or mobile.

5 year warranty, extendible up to 10 years

PROTECTIONS

- AC overvoltages.
- Insulation faults.
- Short-circuits and overloads at the output.
- DC breaker for the PV array.
- Anti-islanding with automatic disconnection.

FEATURES

- Dual MPPT system.
- RS-485 communication for the wattmeter.
- Wi-Fi and Ethernet communication.
- CAN Bus 2.0 communication for the BMS (Battery Management System).
- 2 configurable digital inputs.
- 2 configurable potential free outputs.
- Pre-charging system at the battery input.
- Relay for the neutral to earth connection for critical loads in type TT installations.
- Rapid start-up and view of the installation thanks to the INGECON® SUN Monitor user interface.
- Possibility of operating just from the PV array and of adding the storage system at a later date.
- Suitable for indoor and outdoor installations (IP65).
- Back-up functionality available for self-consumption installations.
- Peak shaving functionality.
- Configuration of the battery charge / discharge times.
- Modbus TCP / Wi-Fi communication with EV chargers.
- DRM0 included (for the Australian market).

www.ingeteam.com
solar.energy@ingeteam.com

Ingeteam

PV+battery hybrid systems, stand-alone and grid-connected

OPERATING MODES:

GRID CONNECTED MODES

- **Self-consumption Mode**
  This operating mode is directed at grid connection systems with renewable energy sources, in order to minimise grid consumption. If the energy generated is greater than demand, then any surplus energy could either be used to charge the batteries or to be injected into the grid. In addition, it features a back-up and a peak shaving functionality. Also, the user can programme the charge / discharge times of the batteries.
- **UPS mode**
  This operating mode has been designed for systems where grid outages are long and frequent, meaning that a back-up power source is required. In order to guarantee a power source, the inverter maintains the batteries charged. During a grid outage, the inverter generates an AC network and the energy stored in the batteries is used to power the critical loads. Its rapid response time means that the grid outage is insignificant for most loads.

SELF-CONSUMPTION DIAGRAM

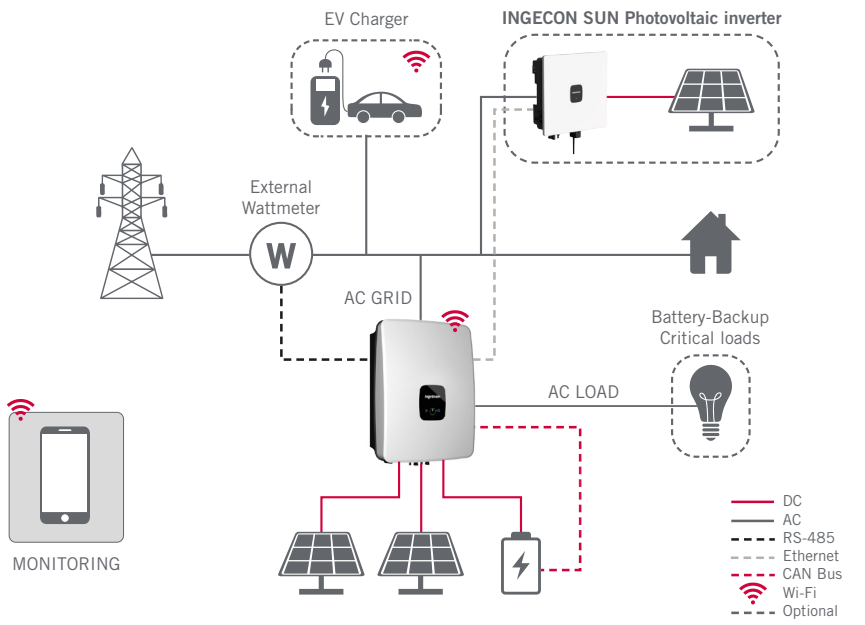

STAND-ALONE MODE

The INGECON® SUN STORAGE 1Play TL M inverter generates a stand-alone AC grid and acts as a grid manager, guaranteeing the correct balance between PV generation, consumption and the storage system. It is equipped with a relay for the neutral-to-earth connection of the system loads in order to create a TT stand-alone network. Moreover, the inverter permits the connection of an auxiliary generator, which can be started-up through a potential-free output for charging the batteries.

UPS DIAGRAM

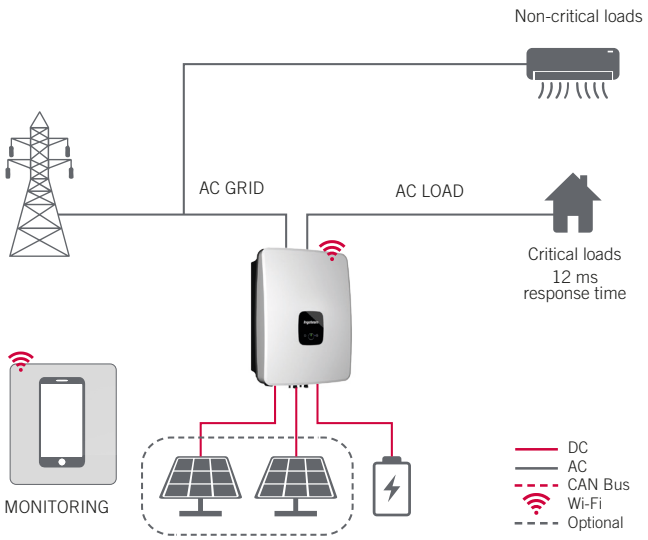

STAND-ALONE DIAGRAM

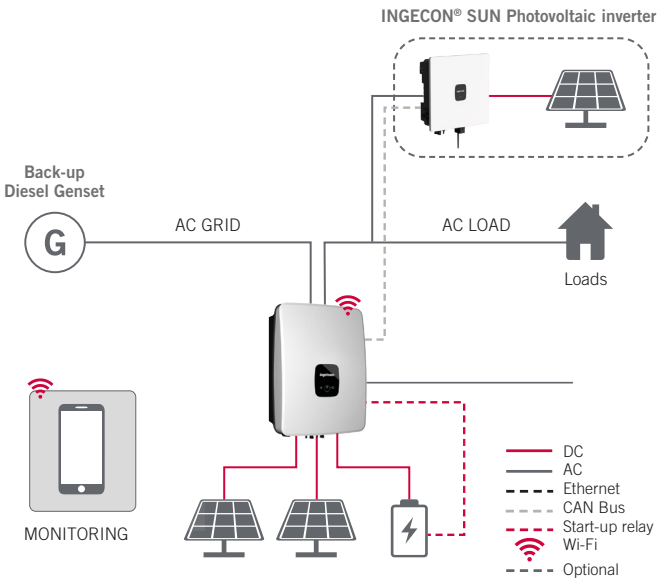

	3TL M	4.5TL M	6TL M
Battery input (DC)			
Voltage range[1]	40 ~ 460 V		
Maximum charge / discharge current	66 A		
Type of battery	Lead-acid, ion-lithium (LG, BYD, Pylontech...)[2]		
Communication with ion-lithium batteries	CAN Bus 2.0		
PV input (DC)			
PV array maximum power	11.5 kWp		
MPP voltage range	80 ~ 480 V		
Operation voltage range	80 ~ 540 V		
Maximum input voltage[3]	550 V		
Maximum input current (input 1 / input 2)[4]	13.5 A / 13.5 A		
Shortcircuit current (input 1 / input 2)	18 A / 18 A		
Number of MPPTs	2		
Number of inputs (input 1 / input 2)	1 / 1		
Grid input (AC)			
Rated voltage	230 V		
Voltage range	172 ~ 264 V		
Nominal Frequency	50 / 60 Hz		
Frequency range	40 ~ 70 Hz		
Network type	TT / TN		
Rated power	3 kW	4.5 kW	6 kW
Max. temperature for rated power	40 °C		
Rated current	13 Arms	20 Arms	26 Arms
Power factor	0 ~ 1		
Critical load output (AC)			
Max. power (25 °C) 30 min, 2 min, 3 s[5]	6,400 / 6,900 / 7,900 W		
Rated current	13 Arms	20 Arms	26 Arms
Rated voltage[6]	220 ~ 240 V		
Rated frequency[6]	50 / 60 Hz		
Power factor	-0.8 ~ 1 ~ 0.8		
Back-up function response time	12 ms		
Features			
Maximum efficiency	95.5%	96%	96%
Euroefficiency	95.1%	95.2%	95.2%
Cooling system			
Cooling system	Forced ventilation		
Air flow	45 m³/h		
Consumption in stand-by mode	< 10 W		
Operating temperature	–20 ~ +65 °C		
Relative humidity (non-condensing)	4 ~ 100 %		
Protection class	IP65		
Maximum altitude	2,000 m		
Marking	CE		
EMC and safety regulations	EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 61000-3-11, EN 61000-3-12, EN 62109-1, EN62109-2, AS62040.1, FCC Part 15		
Grid connection standards	DIN V VDE V 0126-1-1, EN 50438, CEI 0-21, VDE-AR-N4105:2011-08, G59/3, G83/2, AS4777.2:2015, IEC 62116, IEC 61727, UNE 206007-1:2013, UNE 206006:2011, UNE 217001 IN:2015,NRS097-2-1, ABNT NBR 16149, ABNT NBR 16150, South African Grid code, P.O.12.2, G99, EN 50549-1		

Notes: [1] The maximum power supplied by the battery shall be the battery voltage multiplied by the maximum discharge current [2] Consult the Ingeteam website for a list of compatible batteries [3] Never exceed. Consider the voltage increase of the panels 'Voc' at low temperatures [4] For parallel connected PV inputs, the total maximum current would be 27 A [5] In stand-alone mode, these powers are only available if the power of the batteries added to the PV power reaches these values [6] Configurable voltage and frequency.

Weight and dimensions (mm)



3TL M / 4.5TL M / 6TL M

26 kg.

AC power in relation to battery voltage (with no PV power)

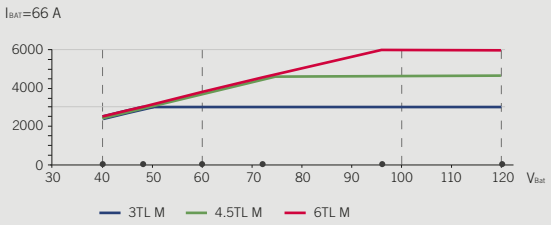

CE

Ingeteam

Ingeteam Power Technology, S.A.
Avda. Ciudad de la Innovación, 13
31621 Sarriguren (Navarra) - Spain
Tel.: +34 948 288 000
Fax: +34 948 288 001
e-mail: solar.energy@ingeteam.com

Ingeteam S.r.l.
Via Emilia Ponente, 232
48014 Castel Bolognese (RA) - Italy
Tel.: +39 0546 651 490
Fax: +39 054 665 5391
e-mail: italia.energy@ingeteam.com

Ingeteam SAS
La Naurouze B - 140 rue Carmin
31670 Labège - France
Tel.: +33 (0)5 61 25 00 00
Fax: +33 (0)5 61 25 00 11
e-mail: france@ingeteam.com

Ingeteam INC.
3550 W. Canal St.
Milwaukee, WI 53208 - USA
Tel.: +1 (414) 934 4100 / +1 (855) 821 7190
Fax: +1 (414) 342 0736
e-mail: solar.us@ingeteam.com

Ingeteam, a.s.
Technologická 371/1
70800 Ostrava - Pustkovec
Czech Republic
Tel.: +420 59 747 6800
Fax: +420 59 732 6899
e-mail: czech@ingeteam.com

Ingeteam Shanghai, Co. Ltd.
Shanghai Trade Square, 1105
188 Si Ping Road
200086 Shanghai - P.R. China
Tel.. +86 21 65 07 76 36
Fax: +86 21 65 07 76 38
e-mail: shanghai@ingeteam.com

Ingeteam, S.A. de C.V.
Leibnitz Ext 13 Int 1102, Colonia Anzures
11590 - Miguel Hidalgo
Ciudad de México - Mexico
Tel.: +52 81 8311 4858
Fax: +52 81 8311 4859
e-mail: northamerica@ingeteam.com

Ingeteam Ltda.
Rua Estácio de Sá, 560
Jd. Santa Genebra
13080-010 Campinas/SP - Brazil
Tel.: +55 19 3037 3773
e-mail: brazil@ingeteam.com

Ingeteam Pty Ltd.
Unit 2 Alphen Square South
16th Road, Randjiespark
Midrand 1682 - South Africa
Tel.: +2711 314 3190
Fax: +2711 314 2420
e-mail: southafrica@ingeteam.com

Ingeteam SpA
Los militares 5890, Torre A, oficina 401
7560742 - Las Condes
Santiago de Chile - Chile
Tel.: +56 2 29574531
e-mail: chile@ingeteam.com

Ingeteam Power Technology India Pvt. Ltd.
2nd Floor, 431
Udyog Vihar, Phase III
122016 Gurgaon (Haryana) - India
Tel.: +91 124 420 6491-5
Fax: +91 124 420 6493
e-mail: india@ingeteam.com

Ingeteam Sp. z o.o.
Ul. Koszykowa 60/62 m 39
00-673 Warszawa - Poland
Tel.: +48 22 821 9930
Fax: +48 22 821 9931
e-mail: polska@ingeteam.com

Ingeteam Australia Pty Ltd.
iAccelerate Centre, Building 239
Innovation Campus, Squires Way
North Wollongong, NSW 2500 - Australia
Tel.: +61 429 111 190
e-mail: australia@ingeteam.com

Ingeteam Panama S.A.
Av. Manuel Espinosa Batista,
Ed. Torre Internacional
Business Center, Apto./Local 407
Urb.C45 Bella Vista
Bella Vista - Panama
Tel.: +50 761 329 467

Ingeteam Service S.R.L.
Bucuresti, Sector 2,
Bulevardul Dimitrie Pompeiu Nr 5-7
Cladirea Hermes Business
Campus 1, Birou 236, Etaj 2
Romania
Tel.: +40 728 993 202

Ingeteam Philippines Inc.
Office 2, Unit 330, Milelong Bldg.
Amorsolo St. corner Rufino St.
1230 Makati
Gran Manila - Philippines
Tel.: +63 0917 677 6039

Ingeteam Power Technology, S.A.
Level 1, Al Bateen Tower C6 Bainunah
ADIB Building, Street 34
PO BOX 30010 - Abu Dhabi
United Arab Emirates
Tel.: +971 50 125 8244

Ingeteam Vietnam Ltd.
Spaces - 28A Tran Hung Dao Street
Phan Chu Trinh Ward
Hoan Kiem District
Ha Noi City - Vietnam
Tel.: +84 24 71014057
e-mail: vietnam@ingeteam.com

Ingeteam Uruguay, S.A.
Avenida 18 de Julio, 1474, Piso 12
11200, Montevideo - Uruguay
Tel.: +598 934 92064