

THREE-PHASE TRANSFORMERLESS BATTERY INVERTER WITH THE MAXIMUM POWER DENSITY

100TL

Three-phase battery inverters for commercial, industrial and large-scale systems. These bi-directional storage inverters feature the same technology as Ingeteam's central photovoltaic inverters.

Lower operational costs

Thanks to the wireless communication network that the INGECON® SUN STORAGE 100TL enables, the storage system could be commissioned, monitored and controlled without cables. Moreover, its string inverter philosophy allows for a fast and easy replacement that does not require qualified technicians.

Greater flexibility and power density

A greater flexibility is possible thanks to its maximum DC voltage (1,100 V) and to its wide input voltage range (570-850 V). Great power density, with 100 kW of power in only 80 kg.

Robust and long-lasting design

Aluminium casing, especially conceived for outdoor installations (IP65). The design of the INGECON® SUN STORAGE 3Play inverter

family guarantees the maximum life expectancy and the best features, even with high temperatures.

Ethernet and Wi-Fi as standard

This battery inverter features Ethernet and Wi-Fi communications as standard. These communications, together with the webserver that the inverter integrates, allow for a faster and more reliable commissioning by using a mobile phone, tablet or laptop. Furthermore, it is compatible with an external Cloud Connect.

EMS Inside

The inverter is equipped as standard with an energy management system (EMS). The EMS permits more advanced functionalities, such as self-consumption. Thanks to the built-in EMS, the installation can be monitored at all times via a Smartphone or a PC with the free INGECON® SUN Monitor application, available at the Play Store and App Store.

Standard 5 year warranty, extendable up to 25 years



100TL

MAIN FEATURES

- EMS inside.
- Low voltage ride-through capability.
- Reactive power capability.
- Compatible with external Cloud Connect software.
- 98.8% maximum efficiency.
- Ethernet and Wi-Fi communications supplied as standard.
- Integrated Webserver.
- Software INGECON® SUN Monitor for PV plant monitoring.
- Suitable for indoor and outdoor installations (IP65).
- High temperature performance.
- 4 digital inputs and 2 digital outputs.
- It is necessary to add a pre-charge system.

PROTECTIONS

- Shortcircuits and overloads at the output.
- Anti-islanding with automatic disconnection.
- Insulation faults.
- AC overvoltages with type 2 surge arresters.
- DC overvoltages with type 2 surge arresters.


OPTIONAL ACCESSORIES

- Self-consumption kit.
- RS-485 communication.

BENEFITS

- Greater power density.
- Greater cost-effectiveness thanks to the cabling cost reduction.
- High availability compared to central inverters.
- High efficiency rates.
- Easy maintenance.

WIRING DIAGRAM

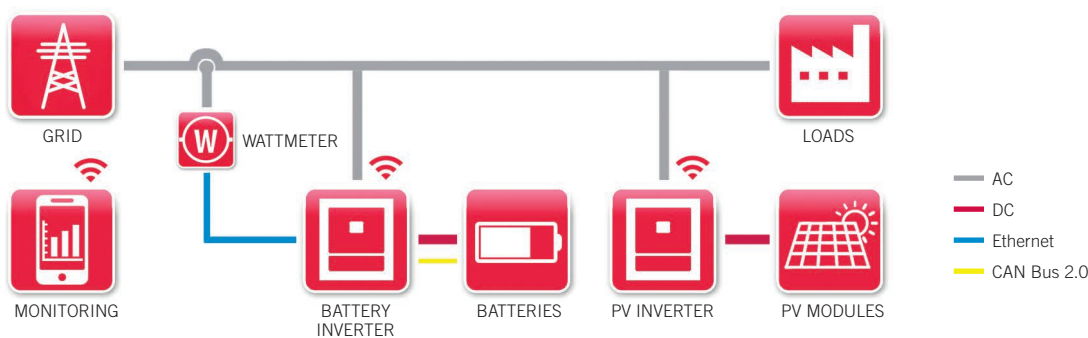


Integrated elements


Terminal blocks
DC switch
DC surge arresters, type 2
AC surge arresters, type 2



3Play TL

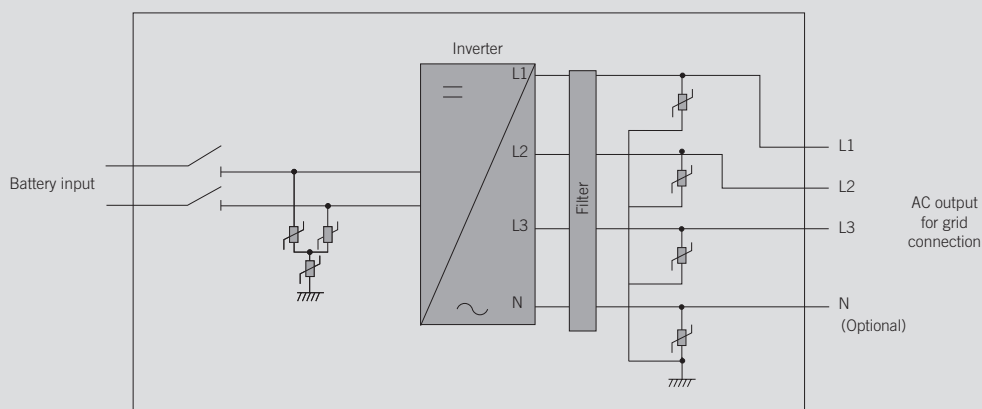

Size and weight (mm)




100TL
80 kg.

	100TL
Input (DC)	
Voltage range ⁽¹⁾	627 - 850 V
Maximum voltage ⁽²⁾	1,100 V
Maximum power (charge / discharge)	60 kW / 100 kW
Maximum current (charge / discharge)	96 A / 159 A
Battery type	Li-ion, lead
Shortcircuit current	240 A
Communication with the BMS (Battery Management System)	CAN Bus 2.0 / Ethernet
Output (AC)	
Maximum power (charge / discharge)	60 kW / 100 kW
Max. temperature at rated power ⁽³⁾	50 °C
Maximum current (charge / discharge)	87 A / 145 A
Rated voltage	400 V
Rated frequency	50 / 60 Hz
Power factor	1
Adjustable power factor	Yes, 0 - 1 (leading / lagging)
THD	<3%
Efficiency	
Maximum efficiency	98.8%
Euroefficiency	98.1%
General Information	
Refrigeration system	Forced ventilation
Air flow	570 m³/h
Stand-by consumption	20 W
Consumption at night	1 W
Ambient temperature	-25 °C to 60 °C
Relative humidity (non-condensing)	0 - 100%
Protection class	IP65 / NEMA 4
RCD	1,000 mA
Maximum operating altitude ⁽⁴⁾	3,000 m
Connection	AC: Max. Cross section: 240 mm² (one wire) DC connection: Max. Cross section: 300 mm² (one wire) Copper and Aluminium cabling permitted for DC and AC
Marking	CE
EMC and safety standards	EN 61000-6-1, EN 61000-6-2, EN 61000-6-4, EN 61000-3-11, EN 61000-3-12, EN 62109-1, EN 62109-2, EN 50178, IEC 62116, IEC 61683, EN 50530, IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-14, IEC 60068-2-30, IEC 60068-2-68
Grid connection standards	IEC 61727, EN 50549-1, EN 50549-2, UNE 206007-1 IN, NTS 2.1 SEPE, NTS 1.1 SENP, CEI 0-21, CEI 0-16, Arrete 9 du Juin, ABNT NBR 16149, ABNT NBR 16150, NDU-015, Portaria 73

Notes: ⁽¹⁾ V_{min batt} is for rated conditions (V_{ac}=1.1 p.u. and Power Factor=1). V_{min batt} will depend on the grid voltage (V_{ac}), according to this relation: V_{min batt}=1.1*1.425*V_{ac} ⁽²⁾ The inverter does not start operating until V_{dc}<1,000 V ⁽³⁾ For each °C of increase, the output power will be reduced at the rate of 2.3% ⁽⁴⁾ Beyond 1,000 m, the maximum temperature at rated power will decrease at the rate of 5.5 °C per every additional 1,000 m.

Efficiency INGECON® SUN STORAGE 100TL V_{dc} = 627 V

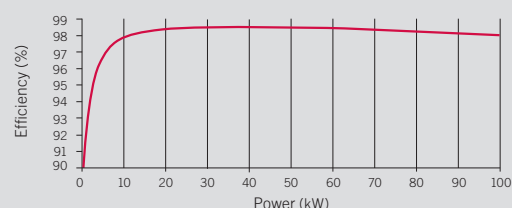

Ingeteam

Ingeteam Power Technology, S.A.
Avda. Ciudad de la Innovación, 13
31621 Sarriena (Navarra) - Spain
Tel.: +34 948 288 000
Fax: +34 948 288 001
e-mail: solar.energy@ingetteam.com

Ingeteam S.r.l.
Via Emilia Ponente, 232
48014 Castel Bolognese (RA) - Italy
Tel.: +39 0546 651 490
Fax: +39 054 665 5391
e-mail: italia.energy@ingetteam.com

Ingeteam SAS
La Naurouze B - 140 rue Carmin
31670 Labège - France
Tel.: +33 (0)5 61 25 00 00
Fax: +33 (0)5 61 25 00 11
e-mail: france@ingetteam.com

Ingeteam INC.
3550 W. Canal St.
Milwaukee, WI 53208 - USA
Tel.: +1 (414) 934 4100 / +1 (855) 821 7190
Fax: +1 (414) 342 0736
e-mail: solar.us@ingetteam.com

Ingeteam, a.s.
Technologická 371/1
70800 Ostrava - Pustkovec
Czech Republic
Tel.: +420 59 747 6800
Fax: +420 59 732 6899
e-mail: czech@ingetteam.com

Ingeteam Shanghai, Co. Ltd.
Shanghai Trade Square, 1105
188 Si Ping Road
200086 Shanghai - P.R. China
Tel.: +86 21 65 07 76 36
Fax: +86 21 65 07 76 38
e-mail: shanghai@ingetteam.com

Ingeteam, S.A. de C.V.
Leibnitz Ext 13 Int 1102, Colonia Anzures
11590 - Miguel Hidalgo
Ciudad de México - Mexico
Tel.: +52 81 8311 4858
Fax: +52 81 8311 4859
e-mail: northamerica@ingetteam.com

Ingeteam Ltda.
Rua Estácio de Sá, 560
Jd. Santa Genebra
13080-010 Campinas/SP - Brazil
Tel.: +55 19 3037 3773
e-mail: brazil@ingetteam.com

Ingeteam Pty Ltd.
Unit 2 Alphen Square South
16th Road, Randjiespark
Midrand 1682 - South Africa
Tel.: +2711 314 3190
Fax: +2711 314 2420
e-mail: southafrica@ingetteam.com

Ingeteam SpA
Los militares 5890, Torre A, oficina 401
7560742 - Las Condes
Santiago de Chile - Chile
Tel.: +56 2 29574531
e-mail: chile@ingetteam.com

Ingeteam Power Technology India Pvt. Ltd.
2nd Floor, 431
Udyog Vihar, Phase III
122016 Gurgaon (Haryana) - India
Tel.: +91 124 420 6491-5
Fax: +91 124 420 6493
e-mail: india@ingetteam.com

Ingeteam Sp. z o.o.
Ul. Koszykowa 60/62 m 39
00-673 Warszawa - Poland
Tel.: +48 22 821 9930
Fax: +48 22 821 9931
e-mail: polska@ingetteam.com

Ingeteam Australia Pty Ltd.
iAccelerate Centre, Building 239
Innovation Campus, Squires Way
North Wollongong, NSW 2500 - Australia
Tel.: +61 429 111 190
e-mail: australia@ingetteam.com

Ingeteam Panama S.A.
Av. Manuel Espinosa Batista,
Ed. Torre Internacional
Business Center, Apto./Local 407
Urb.C45 Bella Vista
Bella Vista - Panama
Tel.: +50 761 329 467

Ingeteam Service S.R.L.
Bucuresti, Sector 2,
Bulevardul Dimitrie Pompeiu Nr 5-7
Cladirea Hermes Business
Campus 1, Birou 236, Etaj 2
Romania
Tel.: +40 728 993 202

Ingeteam Philippines Inc.
Office 2, Unit 330, Milelong Bldg.
Amorsolo St. corner Rufino St.
1230 Makati
Gran Manila - Philippines
Tel.: +63 0917 677 6039

Ingeteam Power Technology, S.A.
Level 1, Al Bateen Tower C6 Bahrainah
ADIB Building, Street 34
PO BOX 30010 - Abu Dhabi
United Arab Emirates
Tel.: +971 50 125 8244

Ingeteam Vietnam Ltd.
Spaces - 28A Tran Hung Dao Street
Phan Chu Trinh Ward
Hoan Kiem District
Ha Noi City - Vietnam
Tel.: +84 24 71014057
e-mail: vietnam@ingetteam.com

Ingeteam Uruguay, S.A.
Avenida 18 de Julio, 1474, Piso 12
11200, Montevideo - Uruguay
Tel.: +598 934 92064