



H2 D-lyzer

DC/DC CONVERTER TO FEED ELECTROLYSERS DIRECTLY FROM A SOLAR PV PLANT

Enabling green hydrogen production

INGECON® H2 D-lyzer enables a true green hydrogen production, as it has been conceived to feed the electrolyser with solar energy.

DC/DC converter

INGECON® H2 D-lyzer is a DC/DC converter with a DC input for the solar PV array and a DC output that connects directly to the electrolyser.

Liquid Cooling System (LCS)

The LCS is a closed circuit supplied totally filled and purged, equipped with fast connectors with an anti-dripping system, so it offers zero risk of particle entrance. It has been designed to avoid siphons in order to easily purge it if necessary. The coolant used is a biodegradable glycol water mixture. There is no need of emptying the LCS in order to replace the phases, nor the sensors.

Ease of maintenance

All the elements can be removed or replaced directly from the converter's front and back sides, thanks to its new design.

Buck converter

The INGECON® H2 D-lyzer is a buck converter, as the output voltage is lower than the input voltage.

H2 D-lyzer DC/DC converter to feed electrolyzers directly from a solar PV plant

Long-lasting design

The converters have been designed to guarantee a long life expectancy, as demonstrated by the stress tests they are subjected to. Standard 2-year warranty, extendable upon request.

Protections

- DC Reverse polarity.
- Short-circuits and overloads at the output.
- Insulation failure DC.
- Lightning induced surge arresters, type II.
- Motorized DC switch.
- Hardware protection via firmware.
- Additional protection for the power stack, liquid cooled, IP65 rated and air cooled by a closed loop.
- Integrated stack discharge system.

Optional accessories

- Lightning induced surge arresters, type I+II.

Easy to operate

The INGECON® H2 D-lyzer converters feature a number of LEDs to show the converter operating status with warning lights to indicate any incidents. All this helps to simplify and facilitate maintenance tasks.

Liquid cooling system



- LCS to refrigerate the IGBTs.
- More optimized component usage: greater thermal stability.
- Less moving components: lower power consumption and less maintenance works.
- No risk of particle entrance.
- C5H anti-corrosive rating with stainless steel components.
- LCS is used in many industries. Thus, it is very reliable, as its components are subject to many validation tests.
- Fast connectors with anti-dripping system Biodegradable glycol water mixture.
- No need of emptying the LCS in order to replace the phases, nor the sensors.

Monitoring and communication

Wi-Fi and dual Ethernet communications supplied as standard. Also included at no extra cost the monitoring applications to record and monitor the converter's internal operating variables through the Internet (alarms, real time production, etc.). Two Ethernet communication ports available (one for monitoring and one for plant controlling), allowing fast and simultaneous plant control.

Advantages

- Enabling green hydrogen production directly from solar energy.
- Higher current density.
- Latest generation electronics.
- More efficient electronic protection.
- Enhanced performance.
- Easier maintenance thanks to its new design and enclosure.
- Lightweight spares.
- Components easily replaceable.
- No medium voltage elements.
- Higher power-to-gas conversion efficiency.
- Simple and modular plant design.

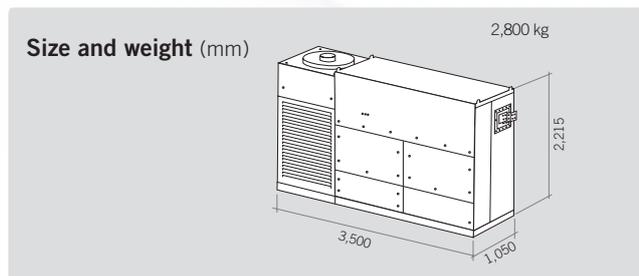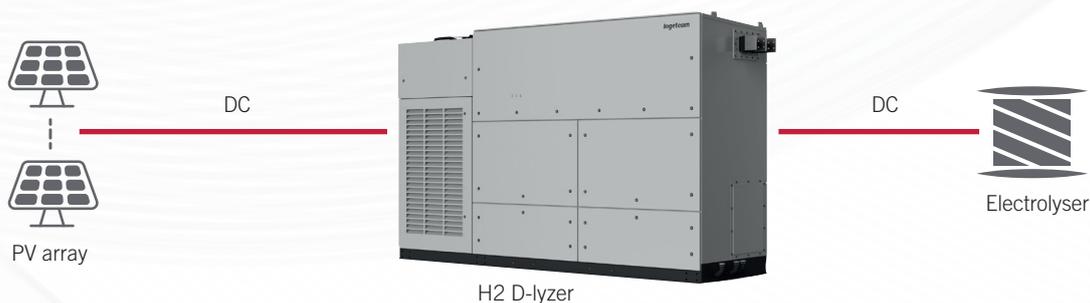

INGECON® H2 D6000

OUTPUT FOR ELECTROLYSER (DC)

Voltage Range	300 ⁽¹⁾ - 1,300 V
Maximum voltage	1,300 V
Rated current ⁽²⁾	6,000 A
Type of connection	Connection to copper bars

OUTPUT PROTECTION

Overvoltage protections	Type II surge arresters (type I+II optional)
Other protections	Insulation failure monitoring / Electrolyser stack discharge system

SOLAR PV INPUT (DC)

Maximum current	6,000 A
Voltage range	300 ⁽³⁾ - 1,300 V
Maximum voltage	1,500 V
Number of inputs with fuse-holders	Up to 24

INPUT PROTECTIONS

Overvoltage protections	Type II surge arresters (type I+II optional)
DC switch	Motorized DC load break disconnect
Other protections	Up to 24 pairs of DC fuses (optional) / Reverse polarity / Insulation failure monitoring / Emergency pushbutton

FEATURES


Maximum efficiency	98.9%
Euroefficiency	98.5%
Max. consumption aux. services	7,600 W
Stand-by consumption	< 180 W

GENERAL INFORMATION

Operating temperature	-20 °C to + 65 °C
Relative humidity (non-condensing)	0 - 100%
Protection class	0 - 100%
Corrosion protection	External corrosion protection
Maximum altitude	4,500 m (for installations beyond 1,000 m, please contact Ingeteam's hydrogen sales department)
Cooling system	Liquid cooling system and forced air cooling system with temperature control (400 V 3 phase + neutral power supply, 50/60 Hz)
Air flow range	0 - 18,000 m ³ /h
Average air flow	12,000 m ³ /h
Acoustic emission (100% / 50% load)	57 dB(A) at 10 m / 49.7 dB(A) at 10 m
Marking	CE
Safety certifications	EN 50178

Notes

(1) For lower voltages, please contact Ingeteam's H2 sales department / (2) This rated current has been calculated for V_{dcmin}=720 V; V_{dcmax}=900 V; ambient temperature 35 °C / (3) It is a buck converter, so the input voltage has to be greater than the output voltage / (4) Except for the LC filter and the air-water heat exchanger, that are IP54.

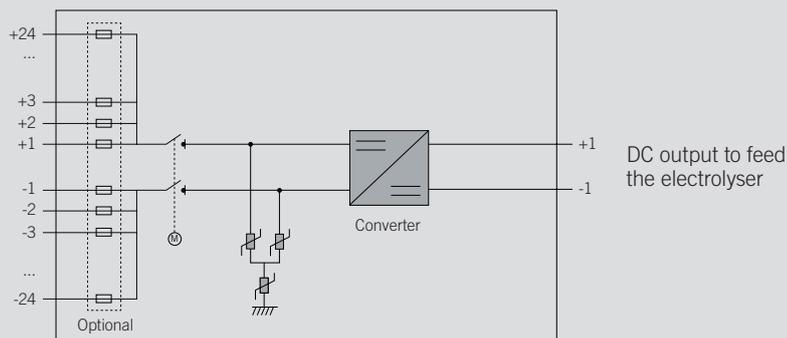

**Ingeteam Power Technology S.A. - Energy**

Sarriguren (Navarra), ESPAÑA
(+34) 94 828 80 00
energy@ingeteam.com

Ingeteam Power Technology S.A. - Paneles

Sesma (Navarra), ESPAÑA
(+34) 94 869 84 55
paneles@ingeteam.com

Ingeteam Power Technology S.A. - Service

Albacete, ESPAÑA
(+34) 96 724 55 04
service@ingeteam.com

Ingeteam Power Technology S.A. - Technology

Zamudio (Bizkaia), ESPAÑA
(+34) 94 403 96 00
technology@ingeteam.com

Ingeteam Power Technology S.A. - Electronics

Zamudio (Bizkaia), ESPAÑA
(+34) 94 403 96 00
ingeteam.electronics@ingeteam.com

Ingeteam Power Technology S.A. - Converters

Ortuella (Bizkaia), ESPAÑA
(+34) 94 403 96 00
technology@ingeteam.com

Ingeteam Indar Machines S.A.

Beasain (Gipuzkoa), ESPAÑA
(+34) 94 302 82 00
indar@ingeteam.com

Ingeteam R&D Europe, S.L.

Zamudio (Bizkaia), ESPAÑA
(+34) 94 403 96 00

Ingeteam SAS

Labège, FRANCIA
33 (0) 5 61 25 00 00
france@ingeteam.com

Ingeteam UK LTD

East Kibride, REINO UNIDO
+44 (0) 141 488 5290

Ingeteam S.r.l

Castel Bolognese (RA), ITALIA
(+39) 0546 651490
Italia.energy@ingeteam.com

Ingeteam GmbH

Düsseldorf, ALEMANIA
+49 (0) 211 7817 7950
deutschland@ingeteam.com

Ingeteam a.s.

Ostrava-Pustkovec, REPÚBLICA CHECA
+42(0) 59 747 68 20
czech@ingeteam.com

Ingeteam Sp.zo.o.

Warsaw, POLONIA
+48 22 821 99 30
polska@ingeteam.com

Ingeteam Service s.r.l.

Constanta, RUMANIA
(+40) 728 993 202

Ingeteam Bulgaria EAD

Kavarna, BULGARIA

Ingeteam Inc Headquarters

Milwaukee, EE.UU.
(+1) 414 934 4100
usa@ingeteam.com

Ingeteam México S.A. de C.V.

Ciudad de México, MÉXICO
(+52) 55 6586 9930
northamerica@ingeteam.com

Ingeteam México S.A. de C.V.

Juchitán (Oaxaca), MÉXICO
+52 971 281 0996
service@ingeteam.com

Ingeteam SpA

Las Condes, Santiago CHILE
(+56) 232 637 200
chile@ingeteam.com

Ingeteam Uruguay S.A.

Montevideo, URUGUAY
+59 8 2623 2805

Ingeteam Panamá S.A.

Penonomé, PANAMÁ
(507) 66444834
service@ingeteam.com

Ingeteam Ltda.

São Paulo, BRASIL
(+55) 19 30 37 37 73
brazil@ingeteam.com

Ingeteam Ltda.

Curitiba, BRAZIL
(+55) 41 32769841
brazil@ingeteam.com

Ingeteam Power Technology Shanghai Co., Ltd

Shanghai, CHINA
+86 139 1622 4886
liu.yimin@ingeteam.com

Ingeteam Vietnam CO., LTD

Hanoi City, VIETNAM

Ingeteam Power Technology SA

Abu Dhabi, UAE
+971 2 207 666

Ingeteam Power Technology India Pvt. Ltd.

Tamilnadu, INDIA

Ingeteam Morocco SARLAU

Casablanca, MARRUECOS

Ingeteam Australia Pty Ltd

North Wollongong, AUSTRALIA