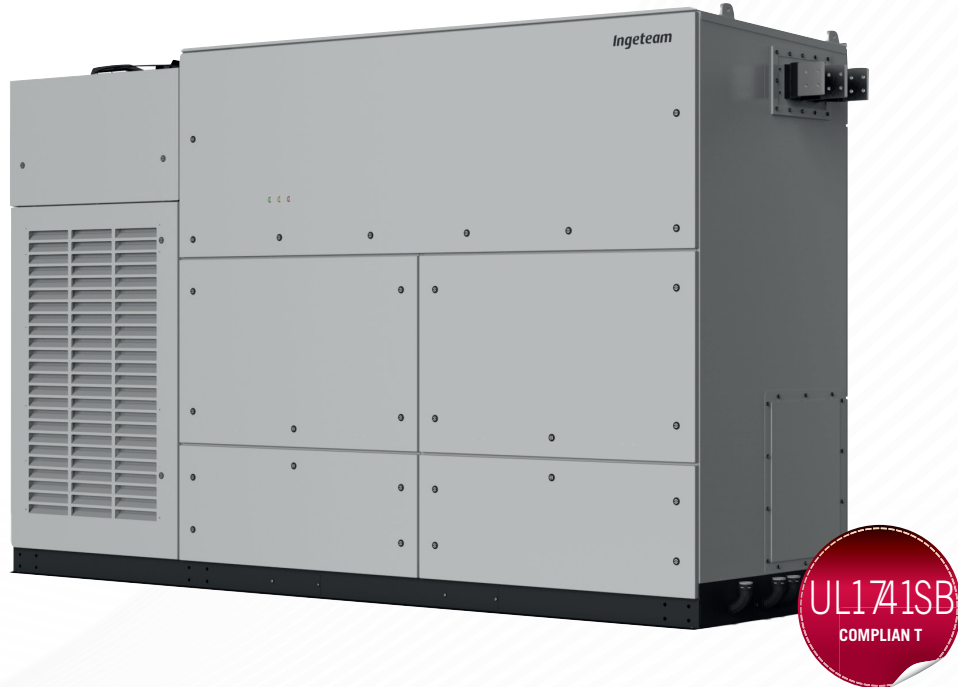


INGECON**SUN STORAGE****3Power U C Series**
1,500 Vdc**UP TO 3.66 MVA AT 1,500 V**

THREE-PHASE TRANSFORMERLESS BATTERY INVERTER WITH AN EXTRA THERMAL STABILITY AND A GREATER POWER DENSITY

The INGECON® SUN STORAGE 3Power U C Series is a three-phase bidirectional battery inverter that can be used in grid-connected and stand-alone systems. This one-of-a-kind battery inverter achieves a market-leading power density of 470 kW/m³, as it provides up to 3,660 kVA in just one power stack.

Latest generation electronics

The INGECON® SUN STORAGE 3Power U C Series battery inverter features an innovative control unit that performs a more efficient and sophisticated inverter control, as it uses a latest generation digital signal processor.

Liquid Cooling System (LCS)

Ingeteam has already supplied +52 GW of liquid-cooled wind power converters worldwide. It offers a greater thermal stability and a more optimized component usage. The LCS has been designed to refrigerate the IGBTs, the power phases and the IP65 / NEMA 3 compartment. It features less moving components, so it consumes a lower amount of power and it requires less maintenance works. The LCS is a closed circuit supplied totally filled and purged, equipped with fast connectors with an anti-dripping system, so it offers zero risk of particle entrance. It has been designed to avoid siphons in order to easily purge it if necessary. The coolant used is a biodegradable glycol water mixture. There is no need of emptying the LCS in order to replace the phases, nor the sensors.

IP65 / NEMA 3 protection

A secondary liquid cooling system is used to refrigerate the air inside the NEMA 3-protected compartment. A water-air heat exchanger is used for that. This compartment contains the power and control electronics, the DC fuses, the DC and AC protections, the busbars and the power phases.

UP TO 3.66 MVA AT 1,500 V

Three-phase transformerless battery inverter with an extra thermal stability and a greater power density

Power converter stands both, grid-following and grid forming operating modes:

Real power related functionalities

Renewable resources integration:

- Ramp limits.
- Power smoothing / firming / curtailment.
- Time shifting.
- Micro grids.

Grid support / Ancillary services:

- Frequency regulation.
- Synthetic inertia.
- Black start.
- Frequency control / protection.
- Virtual "Synchronous Machine".

Investment deferral:

- Peak shaving.
- Load shifting / Load following.
- Real power response improvement of conventional power plants.

Power efficiency:

- Time shifting.
- Price arbitrage.
- Real power response improvement of conventional power plants.
- Peak shaving.

Safety and quality:

- "Un-interruptible" Power.
- Grid code compliance.
- Transmission congestion relief / Power quality-reliability.

Reactive power related functionalities

- Voltage control (Q/V).
- Voltage control / protection.
- Fixed power factor (QPF).
- Fixed reactive power output (Qref).
- Limitation of response of Reactive Power.

Standard 5 year warranty, extendable upon request.

Protections

- Short-circuits and overloads at the output.
- Anti-islanding with automatic disconnection.
- Insulation failure DC.
- Up to 24 pairs of fuse-holders.
- Lightning induced DC and AC surge arresters, type II.
- Motorized DC switch.
- Motorized AC circuit breaker.
- Hardware protection via firmware.
- Additional protection for the power stack, liquid cooled, IP65 rated and air cooled by a closed loop.


Optional Accessories

- Heating kit, for operating at an ambient temperature of down to -30 °C.
- DC surge arresters type I+II.
- AC surge arresters type I+II.
- DC fuses.
- Monitoring of the DC currents.
- Grounding kit.


Liquid cooling system

- LCS to refrigerate the IGBTs.
- More optimized component usage: greater thermal stability.
- Less moving components: lower power consumption and less maintenance works.
- No risk of particle entrance.
- Anti-corrosion protection with stainless steel components
- LCS is used in many industries. Thus, it is very reliable, as its components are subject to many validation tests.
- Fast connectors with anti-dripping system.
- Biodegradable glycol water mixture.
- No need of emptying the LCS in order to replace the phases, nor the sensors.

INGECON® SUN STORAGE 3660TL U

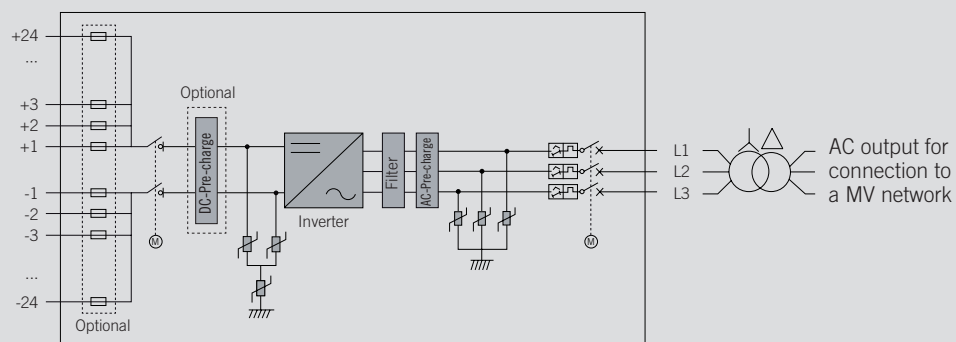

Size and weight (inches and pounds)



6,173 pounds

INGECON® SUN STORAGE 3660TL U

C366

C450

C578

C600

C630

C645

C660

INPUT (DC)

Battery voltage range for off-grid mode	535 - 1,300 V	650 - 1,300 V	826 - 1,300 V	857 - 1,300 V	898 - 1,300 V	919 - 1,300 V	940 - 1,300 V
Battery voltage for grid-tied mode ⁽¹⁾	585 - 1,300 V	712 - 1,300 V	906 - 1,300 V	940 - 1,300 V	985 - 1,300 V	1,008 - 1,300 V	1,031 - 1,300 V
Maximum voltage	1,500 V						
Maximum current	3,850 A						
N° inputs with fuse-holders	Up to 24						
Fuse dimensions	Up to 630 A / 1,500 V / aR / 100 kA (L/R 5mS) (optional)						
Type of connection	Connection to copper bars						
Power blocks	1						

INPUT PROTECTIONS

Overvoltage protections	Type II surge arresters (type I+II optional)
DC switch	Motorized DC load break disconnect
Other protections	Up to 24 pairs of DC fuses (optional) / Reverse polarity / Insulation failure monitoring / Anti-islanding protection

OUTPUT (AC)

Discharge power @1,300 Vdc (95 °F / 122 °F)	2,028.6 kVA / 1,743.3 kVA	2,494.2 kVA / 2,143.4 kVA	3,203.7 kVA / 2,753.1 kVA	3,325.6 kVA / 2,857.9 kVA	3,491.9 kVA / 3,000.8 kVA	3,575 kVA / 3,072.2 kVA	3,658.1 kVA / 3,143.7 kVA
Discharge current @1,300 Vdc (95 °F / 122 °F)	3,200 A / 2,750 A						
Charge power @1,300 Vdc (95 °F / 122 °F)	2,021.7 kVA / 1,737.7 kVA	2,485.6 kVA / 2,136.4 kVA	3,192.6 kVA / 2,744 kVA	3,314.2 kVA / 2,848.6 kVA	3,480 kVA / 2,991 kVA	3,562.7 kVA / 3,062.2 kVA	3,645.6 kVA / 3,133.4 kVA
Charge current @1,300 Vdc (95 °F / 122 °F)	3,189 A / 2,741 A						
Rated voltage ⁽²⁾	366 V IT System	450 V IT System	578 V IT System	600 V IT System	630 V IT System	645 V IT System	660 V IT System
Frequency	50 / 60 Hz						
Power Factor ⁽³⁾	1						
Power Factor adjustable	Yes, 0 - 1 (leading / lagging)						
THD (Total Harmonic Distortion) ⁽⁴⁾	<3%						

OUTPUT PROTECTIONS

Overvoltage protections	Type II surge arresters (type I+II optional)
AC breaker	Motorized AC circuit breaker
Anti-islanding protection	Yes, with automatic disconnection
Other protections	AC short-circuits and overloads

FEATURES

Operating efficiency	98.9%
CEC	98.5%
Max. consumption aux. services	7,600 W
Stand-by or night consumption ⁽⁵⁾	185 W
Average power consumption per day	2,500 W

GENERAL INFORMATION

Ambient temperature	-4°F to +140°F (expandable from -40°F to +140°F)
Relative humidity (non-condensing)	0-100% (Outdoor)
Protection class	NEMA 3 ⁽⁶⁾
Corrosion protection	External corrosion protection
Maximum altitude	14,770 ft (for installations beyond 3,300 ft, please contact Ingeteam's BESS sales department)
Cooling system	Liquid cooling system and forced air cooling system with temperature control (400V 3 phase + neutral power supply, 50/60 Hz)
Air flow range	0 - 18,000 m³/h
Average air flow	12,000 m³/h
Acoustic emission (100% / 50% load)	<57 dB(A) at 10m / <49.7 dB(A) at 10m
Marking	CE
EMC and security standards	UL1741, FCC Part 15, IEEE C37.90.1, IEEE C37.90.2, CSA22.2 No107
Grid connection standards	IEC 62116, UL1741, IEEE1547, IEEE1547.1, NEC CODE, Electric Rule 21: 2015, CSA22.2 No107

Notes

(1) Minimum voltage DC (VDC, min) for Vgrid,max = 1.1 p.u. and Power Factor=1. If Vgrid,max is higher than this value, the minimum voltage should be corrected as VDC, min * Vgrid,max / 1.1. For other DC voltage ranges, please contact Ingeteam's BESS sales department.

(2) Other AC voltages and powers available upon request.

(3) For P_{out}>25% of the rated power.

(4) For P_{out}>25% of the rated power and voltage in accordance with IEC 61000-3-4.

(5) Consumption from Battery.

(6) Except for the LC filter and the air-water heat exchanger, that are NEMA 3R.

**Ingeteam Power Technology S.A. - Energy**

Sarriguren (Navarra), ESPAÑA
(+34) 94 828 80 00
energy@ingeteam.com

Ingeteam Power Technology S.A. - Paneles

Sesma (Navarra), ESPAÑA
(+34) 94 869 84 55
paneles@ingeteam.com

Ingeteam Power Technology S.A. - Service

Albacete, ESPAÑA
(+34) 96 724 55 04
service@ingeteam.com

Ingeteam Power Technology S.A. - Technology

Zamudio (Bizkaia), ESPAÑA
(+34) 94 403 96 00
technology@ingeteam.com

Ingeteam Power Technology S.A. - Electronics

Zamudio (Bizkaia), ESPAÑA
(+34) 94 403 96 00
ingeteam.electronics@ingeteam.com

Ingeteam Power Technology S.A. - Converters

Ortuella (Bizkaia), ESPAÑA
(+34) 94 403 96 00
technology@ingeteam.com

Ingeteam Indar Machines S.A.

Beasain (Gipuzkoa), ESPAÑA
(+34) 94 302 82 00
indar@ingeteam.com

Ingeteam R&D Europe, S.L.

Zamudio (Bizkaia), ESPAÑA
(+34) 94 403 96 00

Ingeteam SAS

Labège, FRANCIA
33 (0) 5 61 25 00 00
france@ingeteam.com

Ingeteam UK LTD

East Kibride, REINO UNIDO
+44 (0) 141 488 5290

Ingeteam S.r.l

Castel Bolognese (RA), ITALIA
(+39) 0546 651490
italia.energy@ingeteam.com

Ingeteam GmbH

Düsseldorf, ALEMANIA
+49 (0) 211 7817 7950
deutschland@ingeteam.com

Ingeteam a.s.

Ostrava-Pustkovec, REPÚBLICA CHECA
+42(0) 59 747 68 20
czech@ingeteam.com

Ingeteam Sp.zo.o.

Warsaw, POLONIA
+48 22 821 99 30
polska@ingeteam.com

Ingeteam Service s.r.l.

Constanta, RUMANIA
(+40) 728 993 202

Ingeteam Bulgaria EAD

Kavarna, BULGARIA

Ingeteam Inc Headquarters

Milwaukee, EE.UU.
(+1) 414 934 4100
usa@ingeteam.com

Ingeteam México S.A. de C.V.

Ciudad de México, MÉXICO
(+52) 55 6586 9930
northamerica@ingeteam.com

Ingeteam México S.A. de C.V.

Juchitán (Oaxaca), MÉXICO
+52 971 281 0996
service@ingeteam.com

Ingeteam SpA

Las Condes, Santiago CHILE
(+56) 232 637 200
chile@ingeteam.com

Ingeteam Uruguay S.A.

Montevideo, URUGUAY
+59 8 2623 2805

Ingeteam Panamá S.A.

Penonomé, PANAMÁ
(507) 66444834
service@ingeteam.com

Ingeteam Ltda.

São Paulo, BRASIL
(+55) 19 30 37 37 73
brazil@ingeteam.com

Ingeteam Ltda.

Curitiba, BRASIL
(+55) 41 32769841
brazil@ingeteam.com

Ingeteam Power Technology Shanghai Co., Ltd

Shanghai, CHINA
+86 139 1622 4886
liu.yimin@ingeteam.com

Ingeteam Vietnam CO., LTD

Hanoi City, VIETNAM

Ingeteam Power Technology SA

Abu Dhabi, UAE
+971 2 207 666

Ingeteam Power Technology India Pvt. Ltd.

Tamilnadu, INDIA

Ingeteam Morocco SARLAU

Casablanca, MARRUECOS

Ingeteam Australia Pty Ltd

North Wollongong, AUSTRALIA